


**VOLKSWAGEN CRAFTER
MERCEDES SPRINTER**

C	S	D
3.500 kg.	160 kg.	17,47 kN



ECE R55
homologación

ELEMENTOS DE UNIÓN / CONNECTION COMPONENTS DAZUGEHÖRENDE TEILEN / ÉLÉMENTS DE RACCORD			
BOLA / BALL / KUGEL / BOULE		VEHÍCULO / VEHICLE FAHRZEUG / VÉHICULE	
			
a	2 x M16x50 DIN 933 8.8	c	8 x M12x140 DIN 933 8.8
b	2 x M16 DIN 985 8	d	10 x M12x40 DIN 933 8.8
		e	18 x M12 DIN 985 8
		f	14 x M12 DIN 125 -
		g	12 x M12 DIN 9021 -

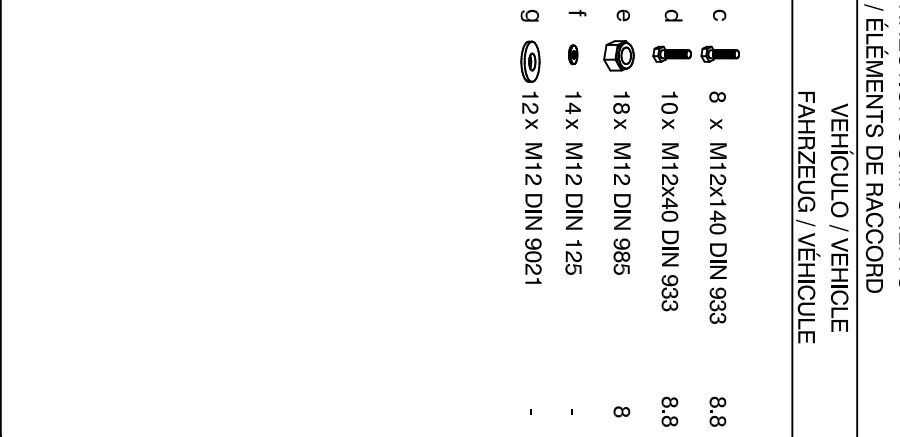



Par de apriete para los tornillos/Tightening torque for bolts/Schrauben Drehmoment/Couple de serrage pour vis											
Und.Nm calibres	M6		M8		M10		M12		M14		M16
	1	1,25	1,5	1,25	1,75	1,5	1,25	1,5	1,75	1,5	2
8,8	11,3	27,3	54,0	57,0	93,0	97,0	101,0	148,0	159,0	230,0	230,0
10,9	16,5	40,1	79,0	83,0	137,0	143,0	149,0	218,0	234,0	320,0	320,0
12,9	19,3	46,9	93,0	98,0	160,0	167,0	174,0	255,0	274,0	395,0	395,0

Este documento debe ser presentado en la I.T.V. junto con el certificado de montaje.

HNOS.SANCHEZ-LAFUENTE,S.A. no asume ningún tipo de responsabilidad por
daños causados por usos inadecuados.

Made by ARGENTE
SPAIN
☎ TEL (+34) 952 025 340
www.lafuente.es

lafuente
E9

5SR-01 2382

TIPO EE0533 ID 17,47 kN
CLASE A-50X S 160 kg

Made by ARGENTE
SPAIN
☎ TEL (+34) 952 025 340
www.lafuente.es

lafuente
E9

5SR-01 2383

TIPO EE3533 ID 17,47 kN
CLASE A-50X S 160 kg

Made by ARGENTE
SPAIN
☎ TEL (+34) 952 025 340
www.lafuente.es

lafuente
E9

5SR-01 2383

TIPO EE3533 ID 17,47 kN
CLASE A-50X S 160 kg

Made by ARGENTE
SPAIN
☎ TEL (+34) 952 025 340
www.lafuente.es

lafuente
E9

5SR-01 2383

TIPO EE3533 ID 17,47 kN
CLASE A-50X S 160 kg

Comprobar en el Certificado de Conformidad (COC) del vehículo las capacidades máximas de arrastre y carga vertical.
See the Certificate Of Conformity (COC) of your vehicle or contact your dealer to verify
the max. trailer weight of your car!



EE0533




EE3533

MERCEDES SPRINTER


VOLKSWAGEN CRAFTER

Instrucciones de montaje - Installation instructions - Notice de montage - Montage- og driftsvejledning


1

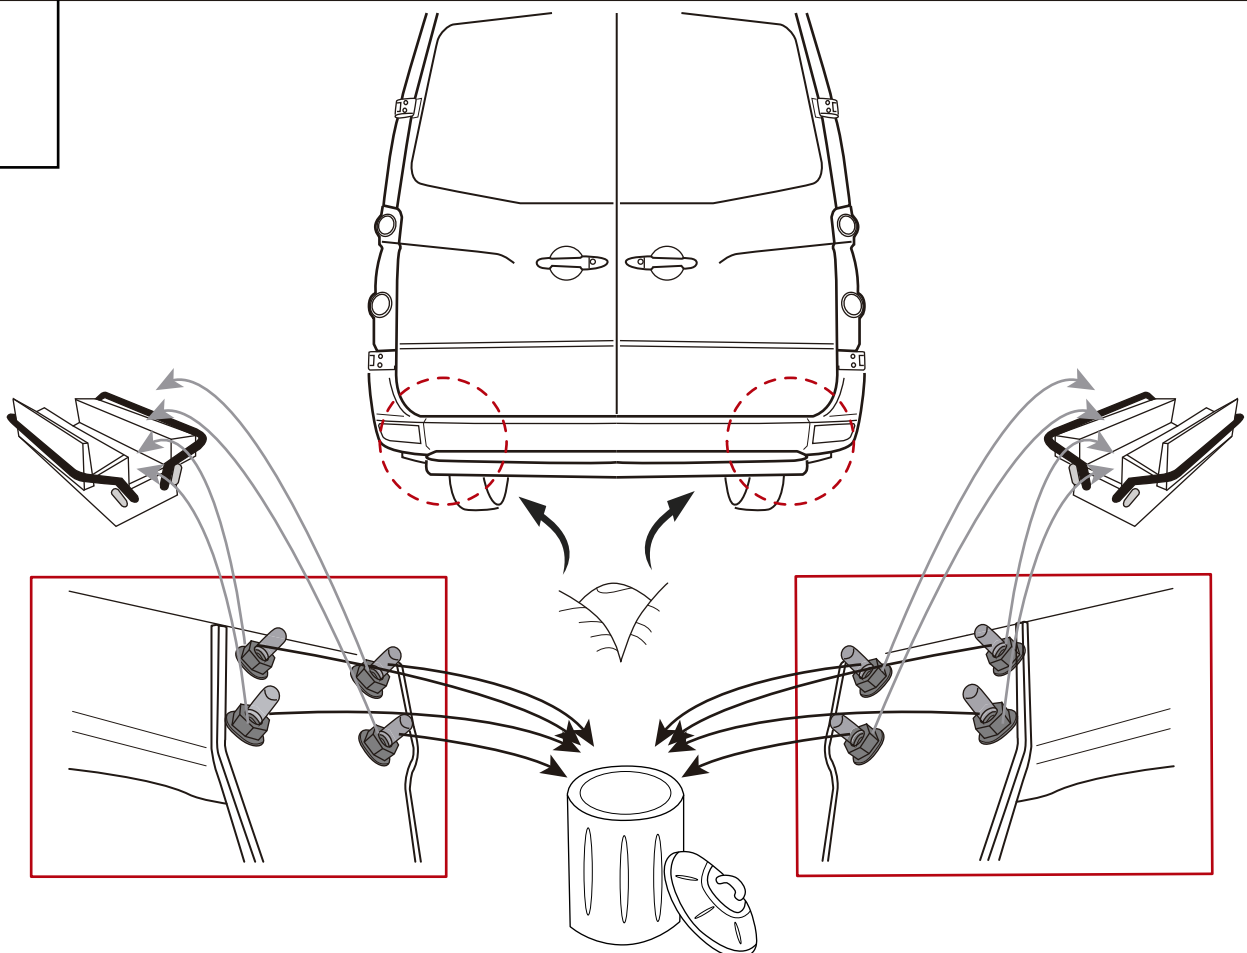


2

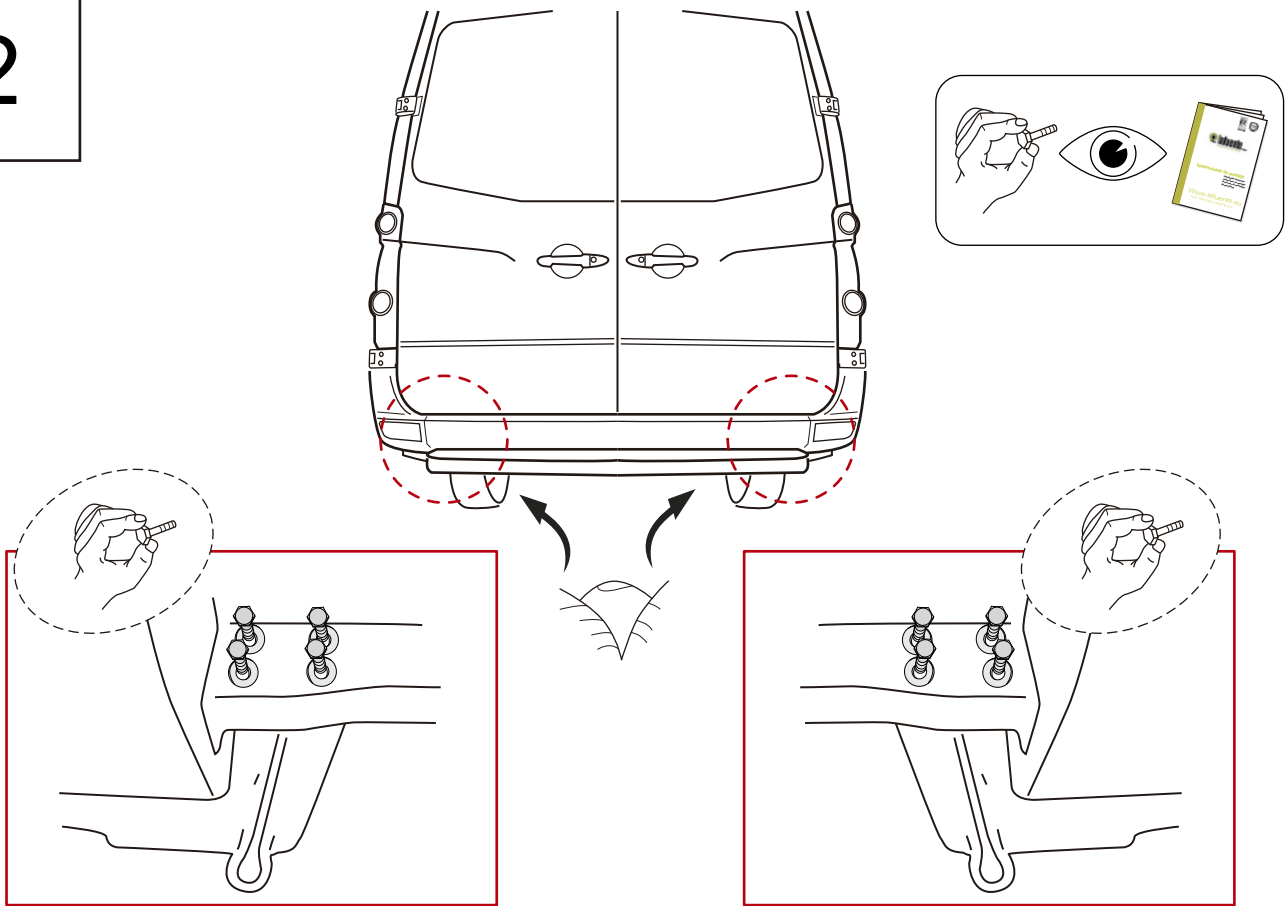


3

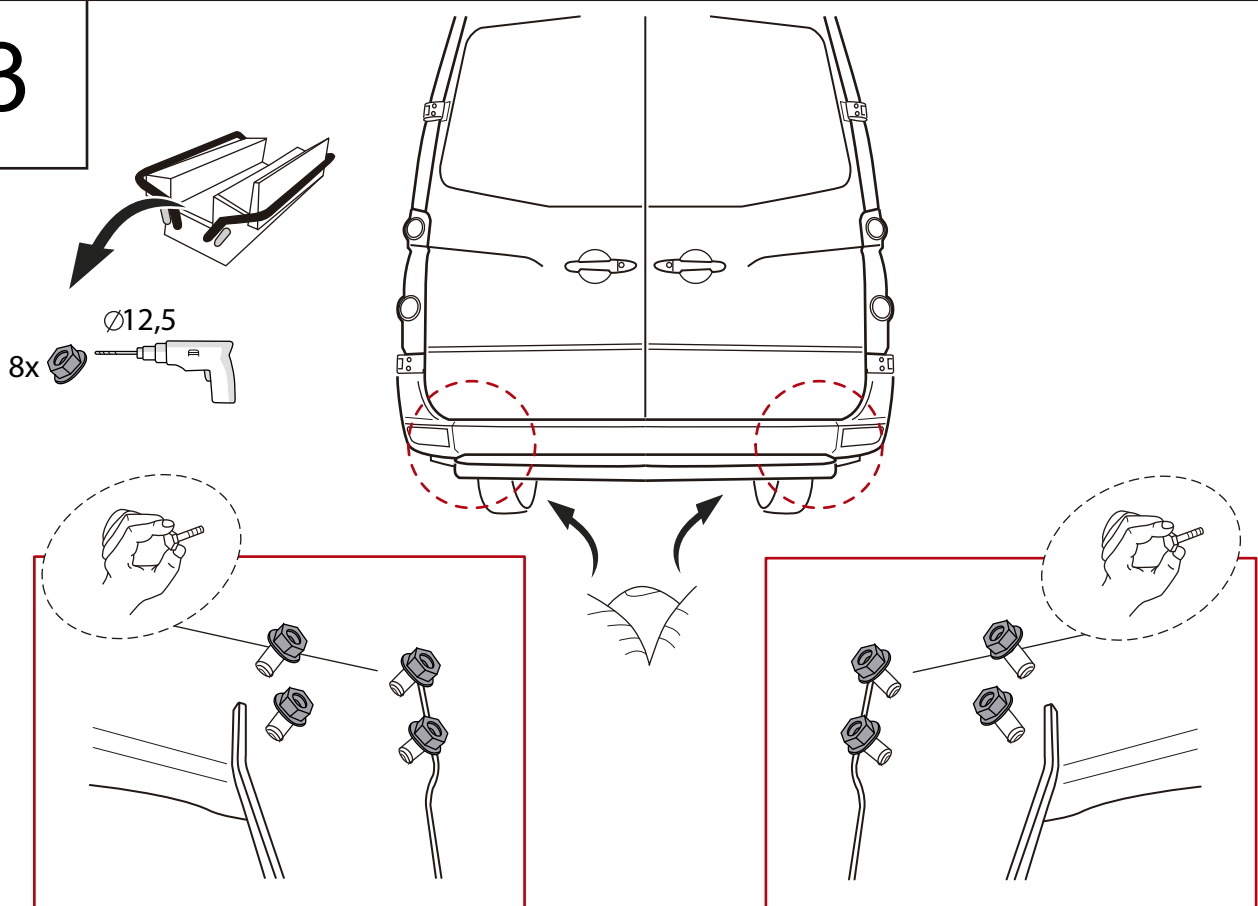









4

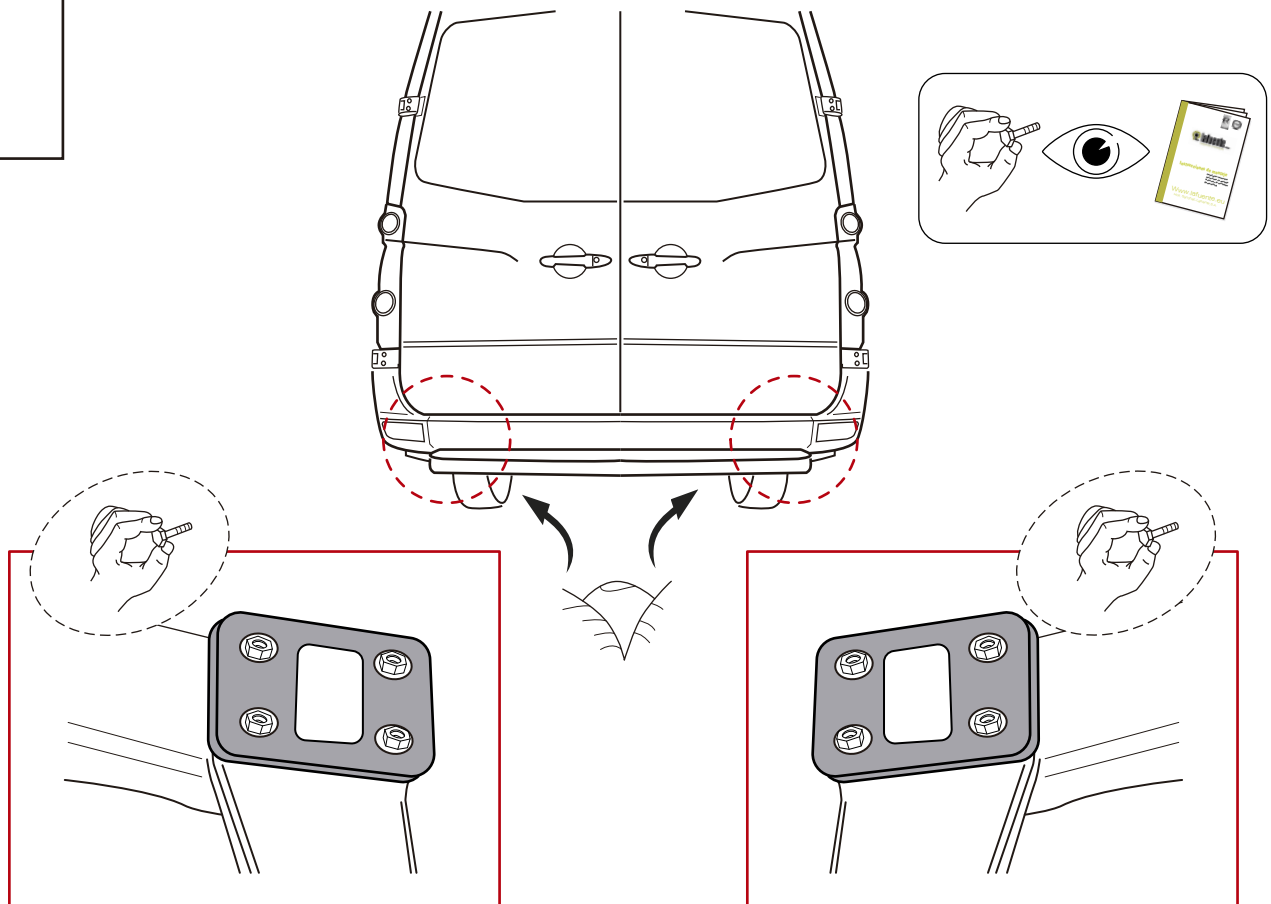

5

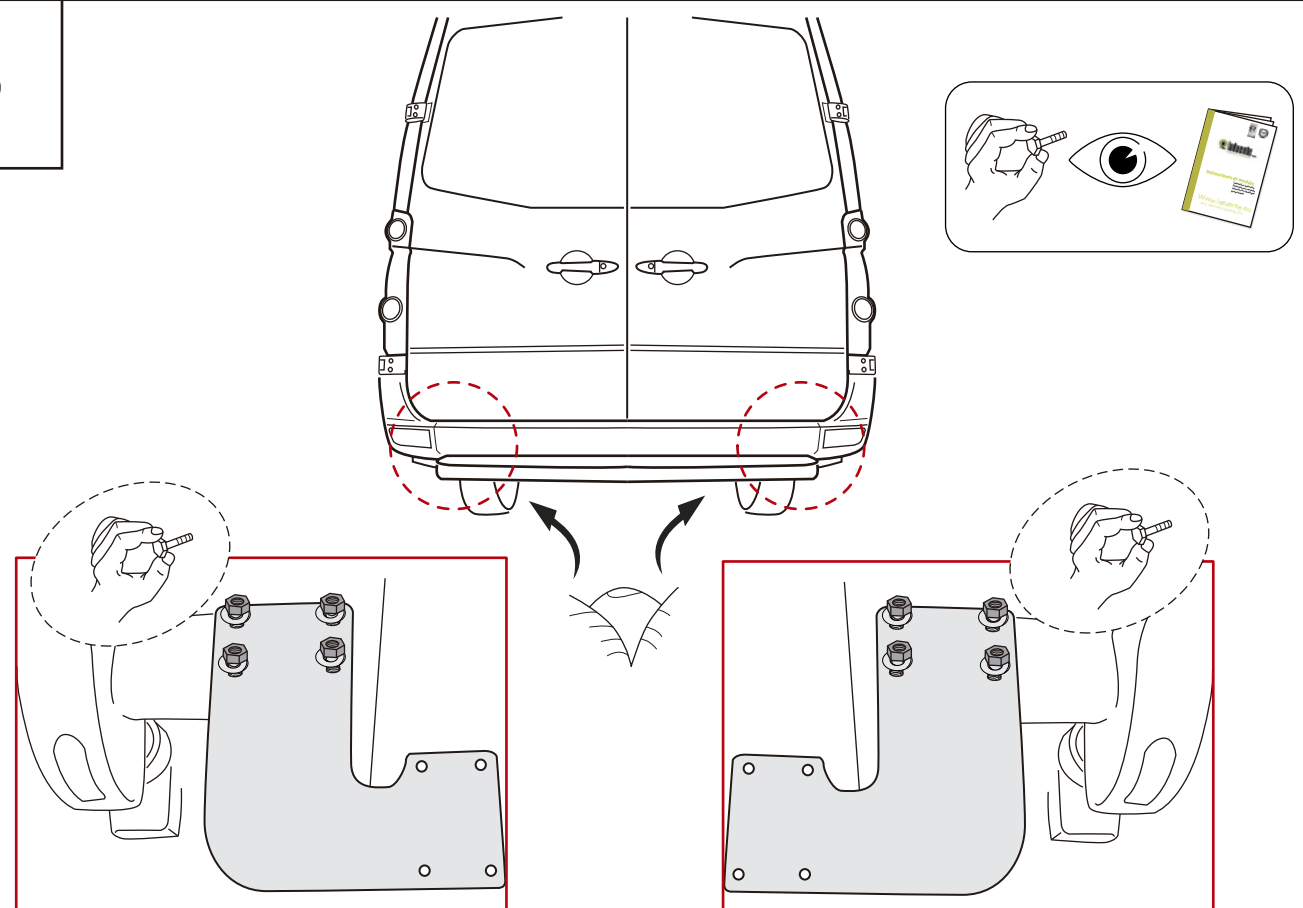

6

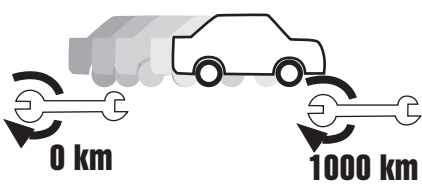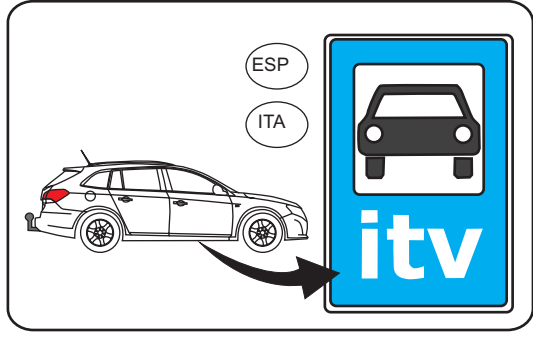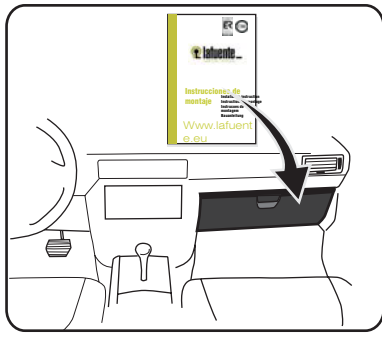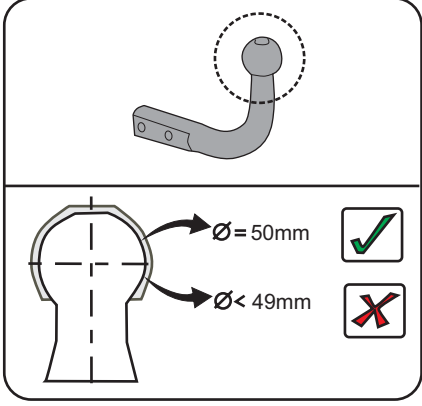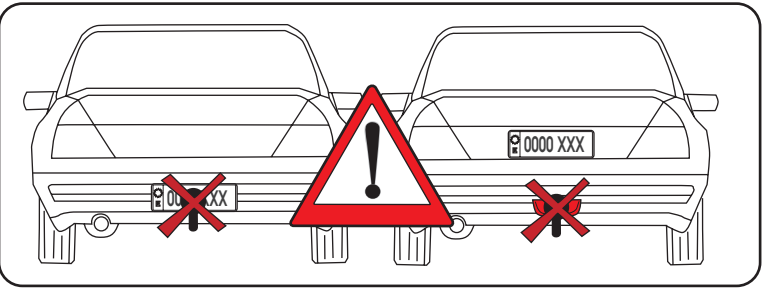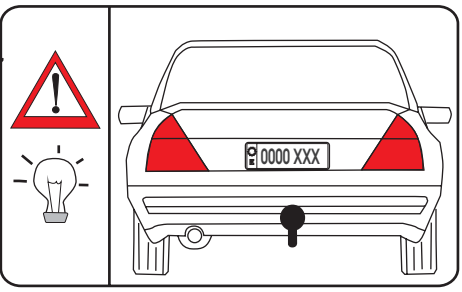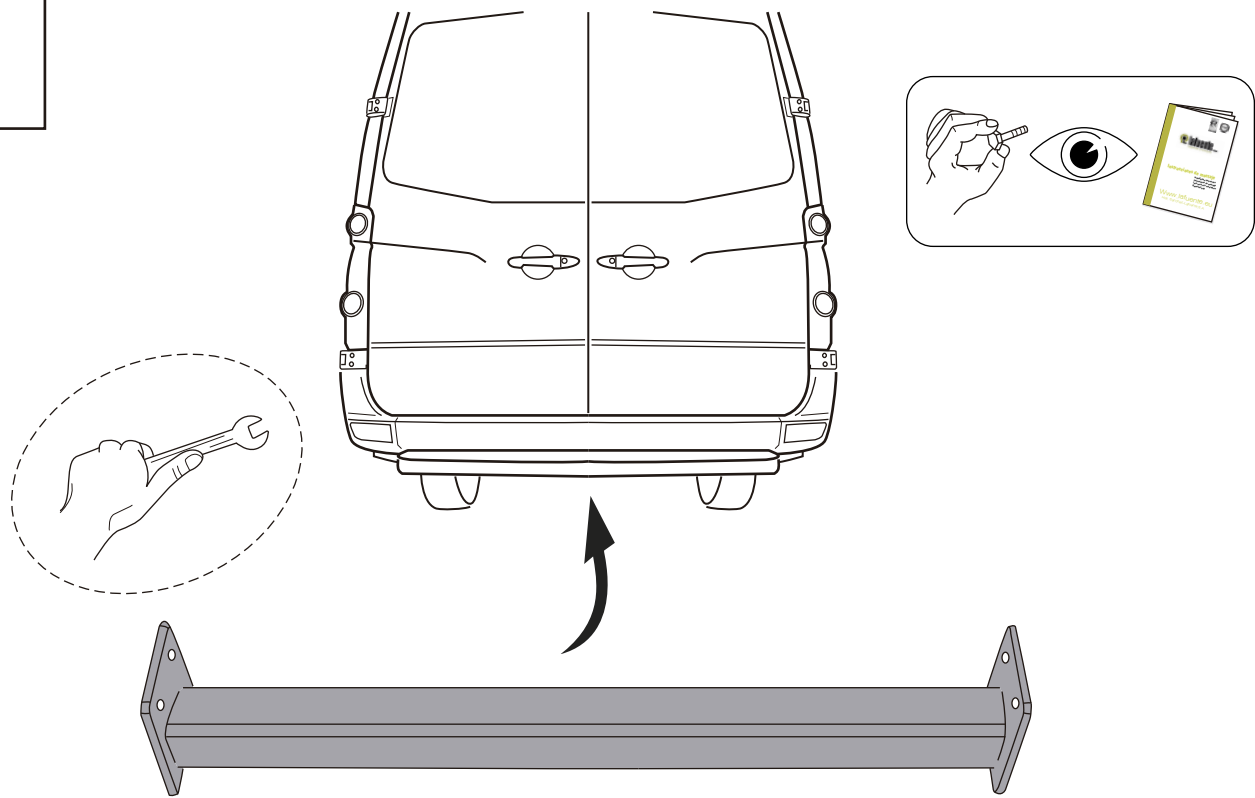

	M6	M8	M10	M12	M14	M16
8.8	10,4Nm	25,0Nm	51,0Nm	87,0Nm	140,0Nm	215,0Nm
10.9	15,5Nm	37,0Nm	75,0Nm	130,0Nm	205,0Nm	310,0Nm
12.9	18,0Nm	43,0Nm	87,0Nm	150,0Nm	240,0Nm	370,0Nm