




SEAT  
TOLEDO

Nº de homologación  
Official approval number  
Prüfung Nr.  
Nº d'homologation

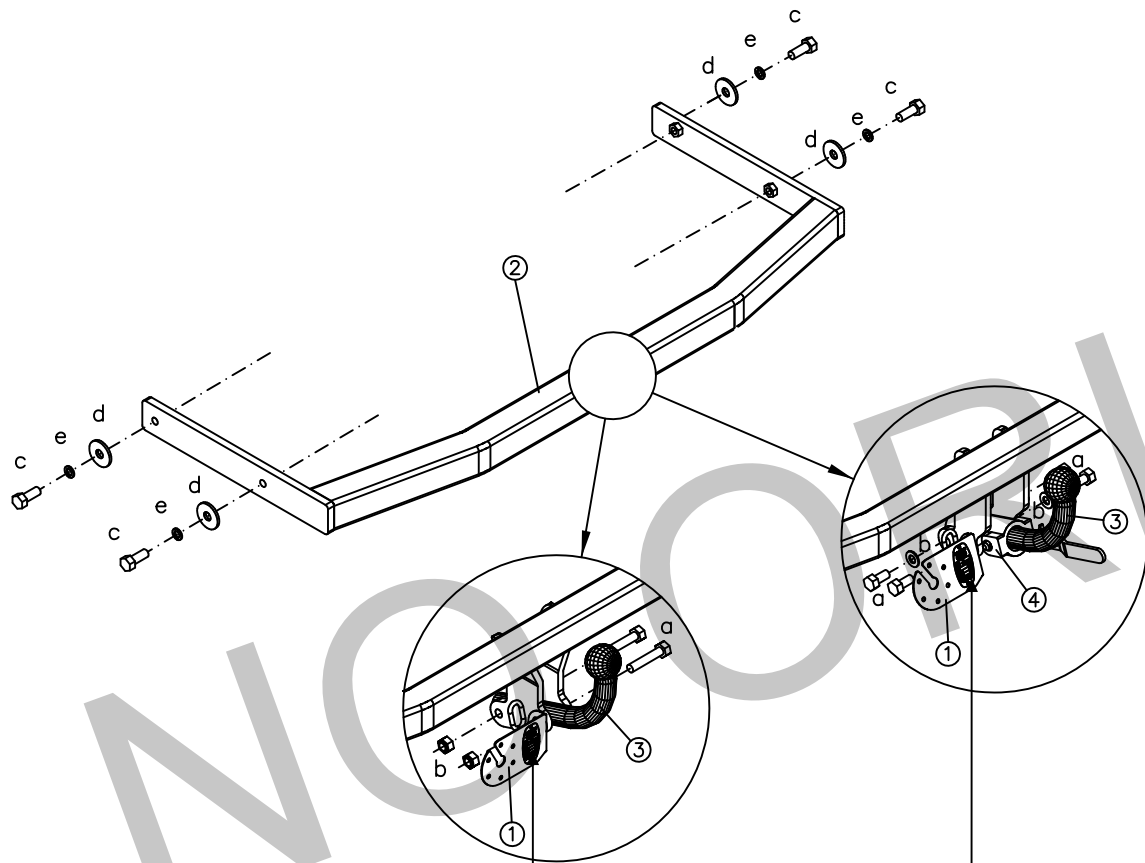

|            |        |         |
|------------|--------|---------|
| M.M.R.<br> | S<br>  | D       |
| 1.600 kg.  | 75 kg. | 8,62 kN |

Par de apriete para los tornillos  
Tightening torque for bolts  
Schrauben Drehmoment  
Couple de serrage pour vis

|    |    |    |    |    |     |     |
|----|----|----|----|----|-----|-----|
| mm | 6  | 8  | 10 | 12 | 14  | 16  |
| Nm | 10 | 25 | 55 | 85 | 135 | 200 |

Enganche homologado según Directiva 94/20 CE.  
Hitch officially approved in accordance with Directive 94/20 CE.  
Geprüfte Kupplung gemäß Kennzeichen 94/20 CE.  
Crochet homologué selon la Directive 94/20 CE.

ELEMENTOS DE UNIÓN / CONNECTION COMPONENTS  
DAZUGEHÖRENDE TEILEN / ÉLÉMENTS DE RACCORD

| BOLA / BALL / KUGEL / BOULE                           | VEHÍCULO / VEHICLE<br>FAHRZEUG / VÉHICULE                                  |
|-------------------------------------------------------|----------------------------------------------------------------------------|
| <br>a  2 x M12x65 DIN 931 8.8<br>b  2 x M12 DIN 985 8 | c  4 x M10x40 DIN 933 8.8<br>d  4 x M10 DIN 125 -<br>e  4 x M10 DIN 6798 - |
| <br>a  4 x M12x25 DIN 933 8.8<br>b  4 x M12 DIN 125 - |                                                                            |

Este documento debe ser presentado en la I.T.V. junto con el certificado de montaje.  
HNOS.SÁNCHEZ-LAFUENTE,S.A. no asume ningún tipo de responsabilidad por daños causados por usos inadecuados.


Nº Rev: 01 Aprobado: 13-07-15



EE0098




EE1098

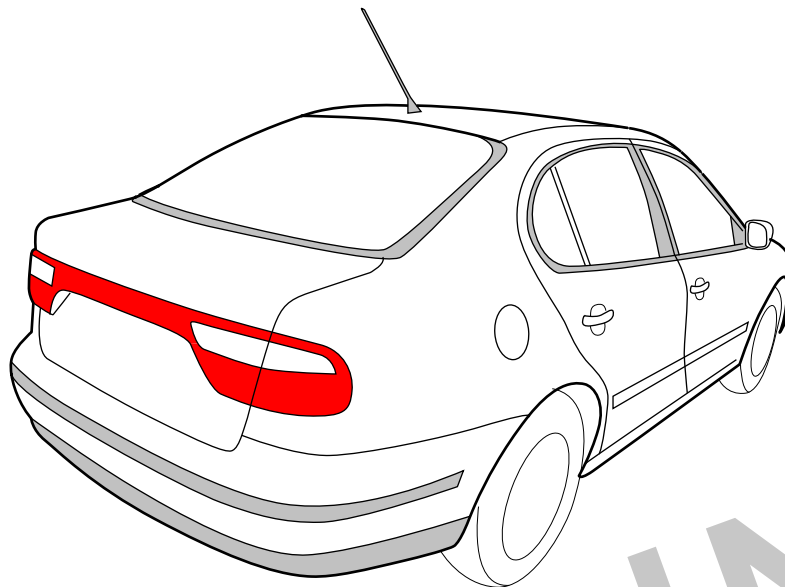


# SEAT TOLEDO

Instrucciones de montaje - Installation instructions - Notice de montage - Montage- og driftsvejledning



1

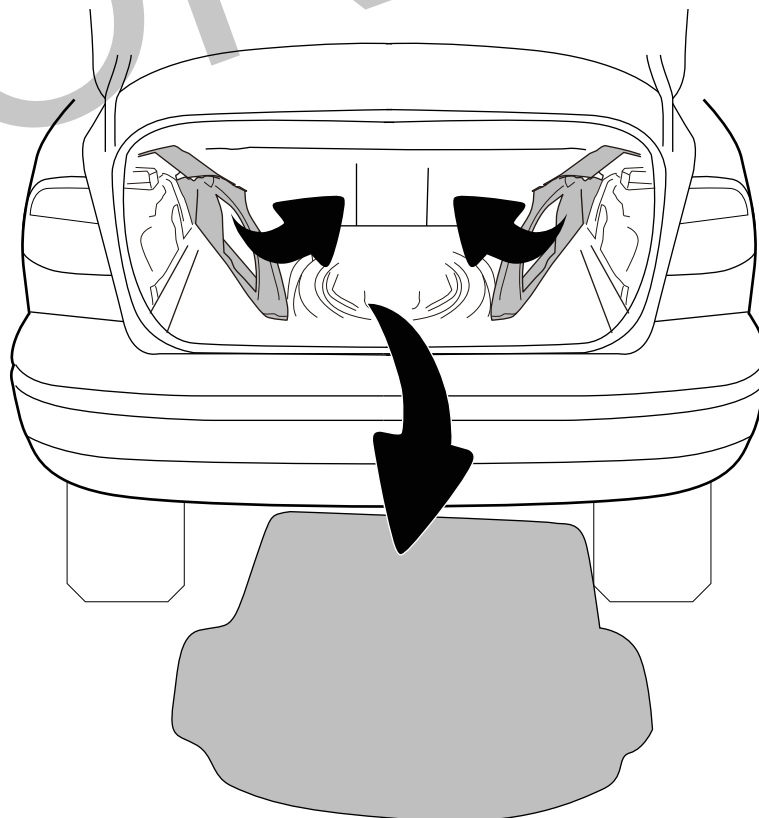

2

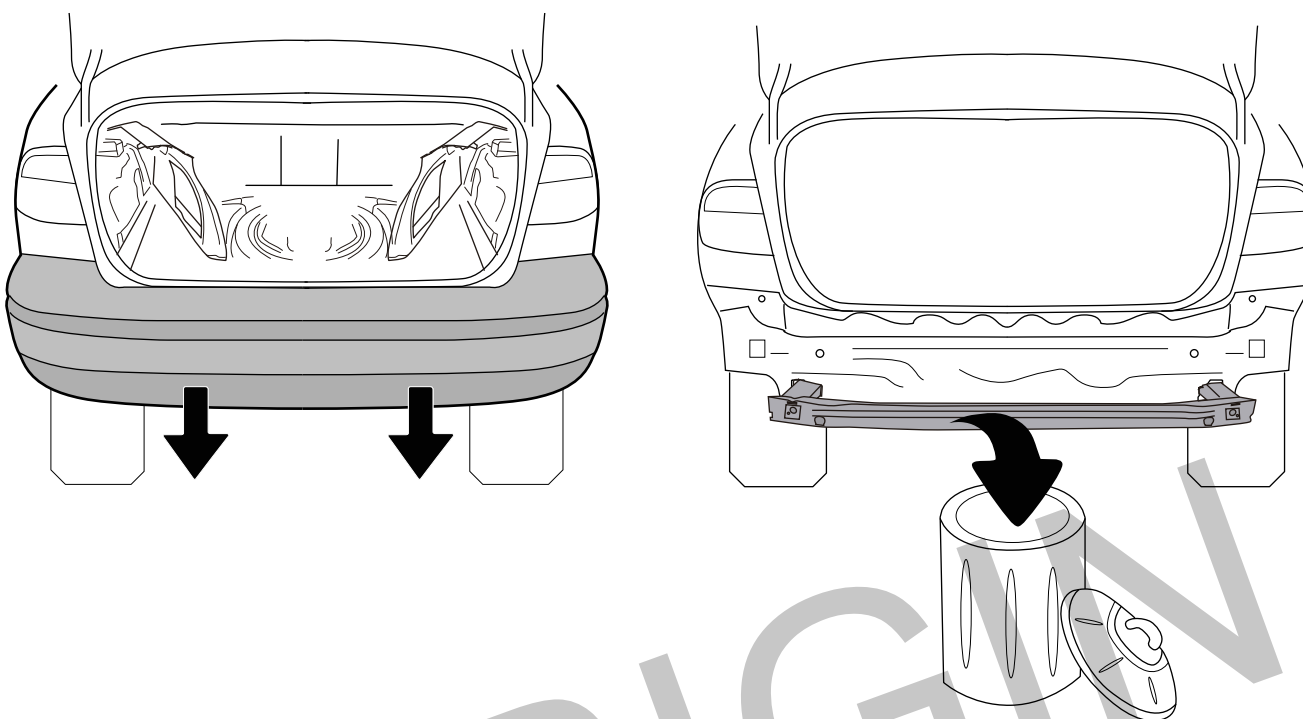


3

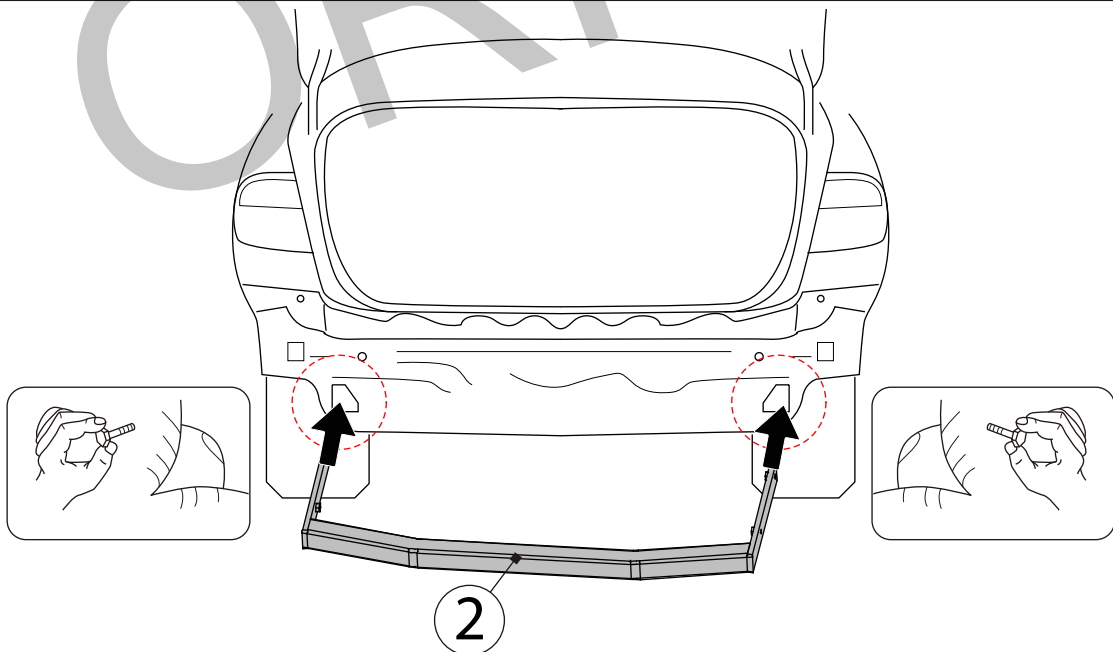








|  | M6     | M8     | M10    | M12     | M14     | M16     |
|-------------------------------------------------------------------------------------|--------|--------|--------|---------|---------|---------|
| 8.8                                                                                 | 10,4Nm | 25,0Nm | 51,0Nm | 87,0Nm  | 140,0Nm | 215,0Nm |
| 10.9                                                                                | 15,5Nm | 37,0Nm | 75,0Nm | 130,0Nm | 205,0Nm | 310,0Nm |
| 12.9                                                                                | 18,0Nm | 43,0Nm | 87,0Nm | 150,0Nm | 240,0Nm | 370,0Nm |

4

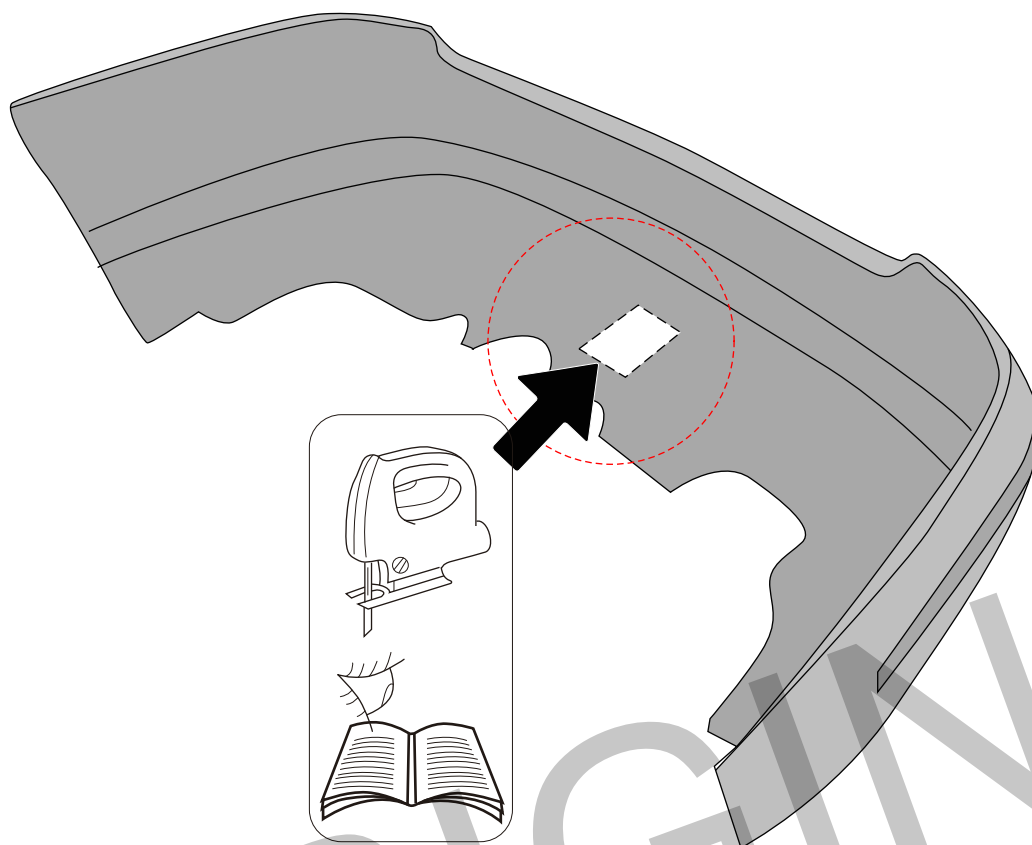

5

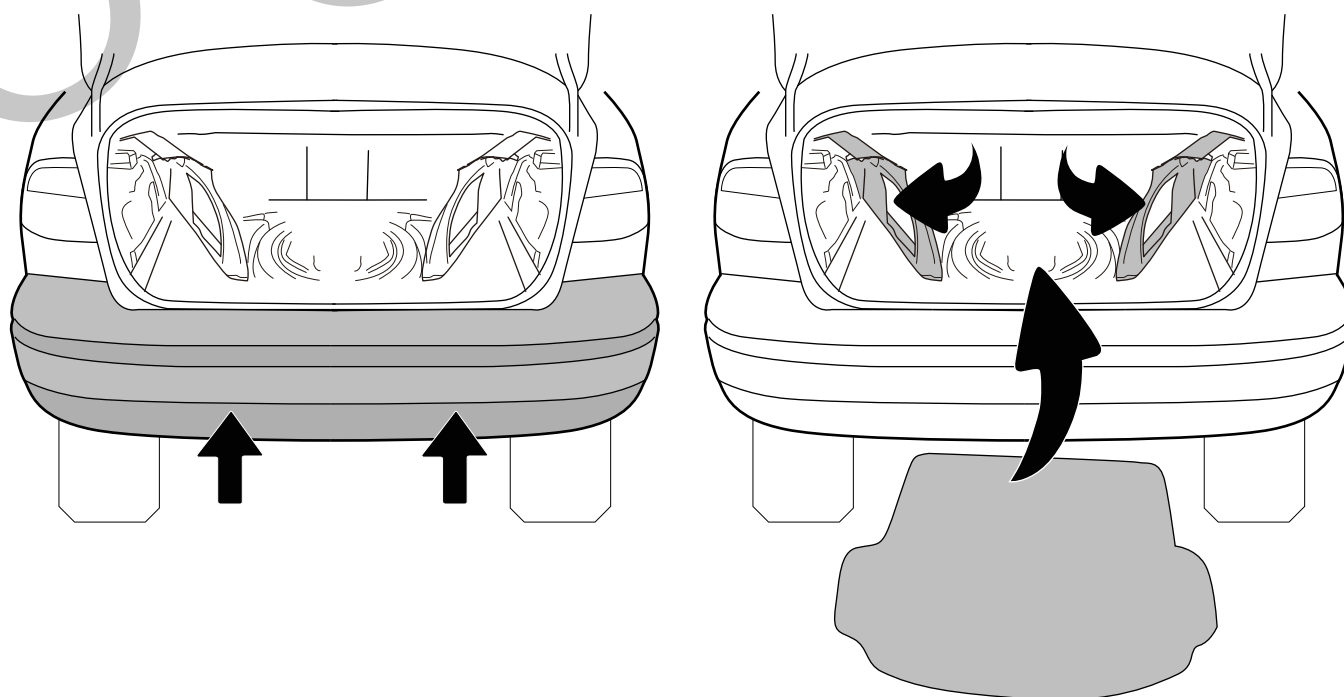

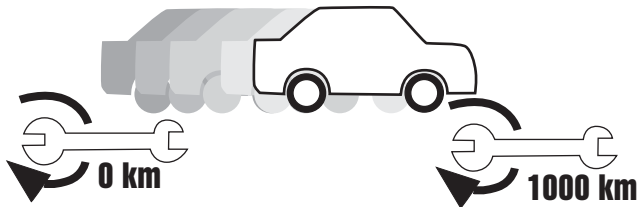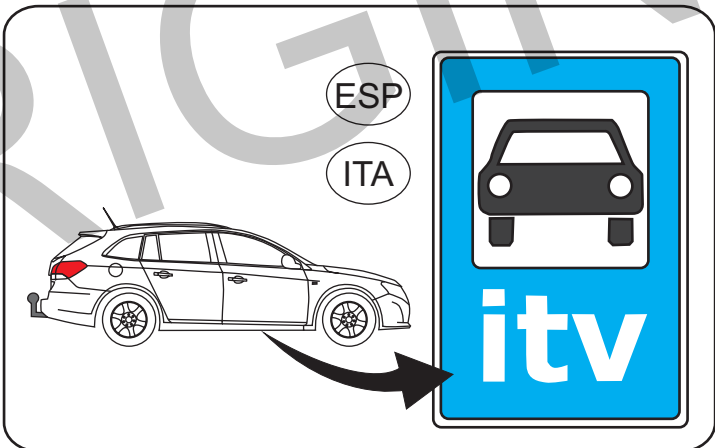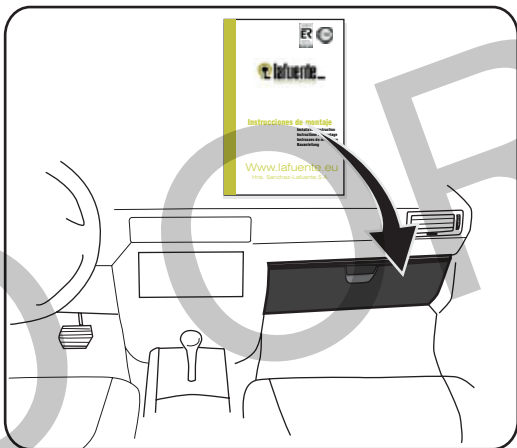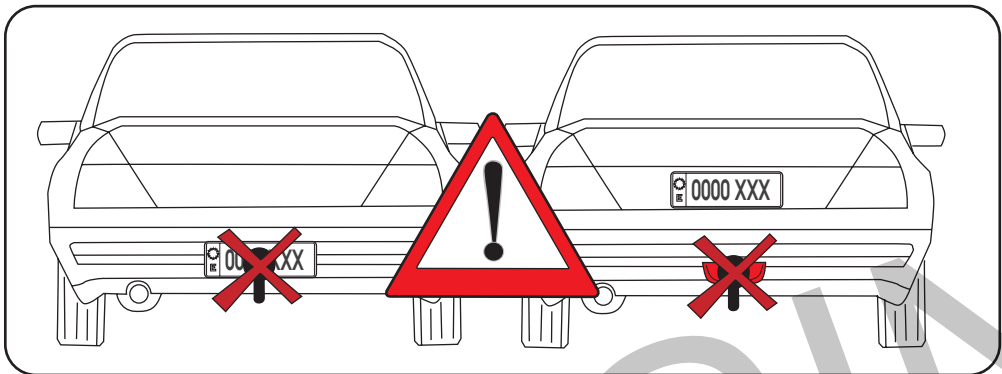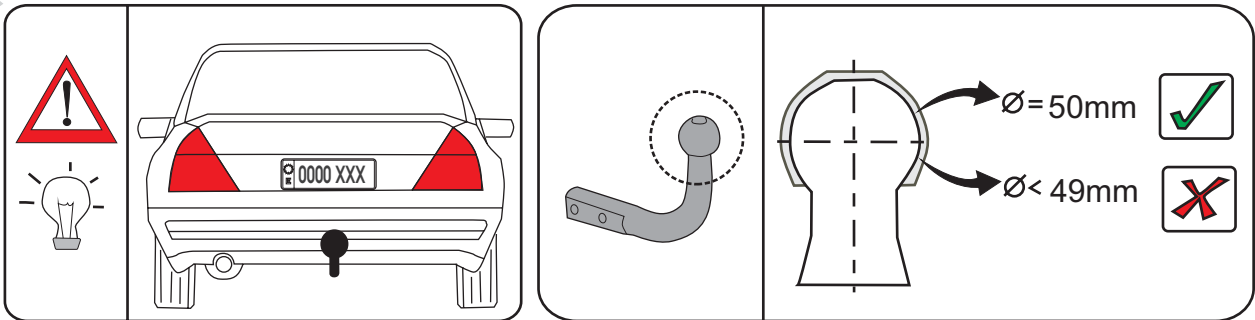

|      | M6     | M8     | M10    | M12     | M14     | M16     |
|------|--------|--------|--------|---------|---------|---------|
| 8.8  | 10,4Nm | 25,0Nm | 51,0Nm | 87,0Nm  | 140,0Nm | 215,0Nm |
| 10.9 | 15,5Nm | 37,0Nm | 75,0Nm | 130,0Nm | 205,0Nm | 310,0Nm |
| 12.9 | 18,0Nm | 43,0Nm | 87,0Nm | 150,0Nm | 240,0Nm | 370,0Nm |

